

# GS3-200 & GS3-500

## PRODUCT SPECIFICATIONS



### ○ GAS/ODOR FILTRATION SYSTEM

#### **Eliminates Noxious, Toxic Gases and Odors from Commercial, Industrial and Laboratory Environments**

##### **Adsorbent Cells**

- Comprehensive selection of media enclosed in a light-weight, disposable recyclable shell

##### **Cabinet-Mounted Controls**

- Gas sensor
- Lighted on/off switch
- Fuse

##### **Technical Support**

- Computer-generated media selection and service life analysis

##### **For Added Safety**

Hazardous location rated controls and electrics (optional)

##### **Quiet, Powerful Blower**

- Centrifugal, direct-drive brushless, no lube and auto-thermal reset

##### **Welded Steel Cabinet**

- For ducted or ambient use

##### **Optional Accessories**

- State-of-the-art articulating arms and a wide selection of hoods and flex hoses for source-capture use



The complete odor & gas elimination system - nothing else to buy, just unpack, plug-in, switch on. Provides high-efficiency, continuous-duty odor & gas control in a compact package.

**FUMEX®**... your guarantee to safety reliability, flexibility and ease of operation.

# GS3-200 & GS3-500


## PRODUCT SPECIFICATIONS



### TECH DATA GS3-200 & GS3-500

For medium-to-heavy flows of gas & odor

#### DIMENSIONS - INCHES

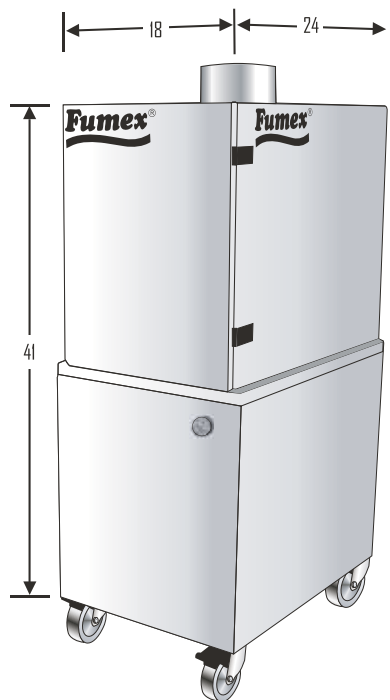

#### GS3-200 Specifications

##### Construction:

Cabinet: 304 Stainless Steel  
Baffled – sound attenuated  
Sound Level: 59 dbA  
Weight: 80 lbs

##### Blowers:

Performance: 200 cfm @ 12" wc  
Centrifugal - direct-drive,  
brushless motor

##### Electrics/Controls:

120/1/50-60 or 230/1/50-60  
Pre-wired 3 wire power cable,  
7.5 ft (2.3m) w/plug

##### Standard Equipment

1 x 6" or 2 x 3" air inlet  
(4) Industrial grade wheels  
Installation guide / Operations manual

##### Standard Filter Set

Adsorbent Cell: Large capacity  
gas/odor filter (2)

##### Options:

- High efficiency hoods
- Optional piped exhaust
- Gas-specific adsorbent cells

#### GS3-500 Specifications

##### Construction:

Cabinet: 304 Stainless Steel  
Baffled – sound attenuated  
Sound Level: 59 dbA  
Weight: 150 lbs

##### Blowers:

Performance: 500 cfm @ 8" wc  
Centrifugal - direct-drive,  
brushless motor

##### Electrics/Controls:

120/1/50-60 or 230/1/50-60  
Pre-wired 3 wire power cable,  
7.5 ft (2.3m) w/plug

##### Standard Equipment

1 x 6" or 2 x 3" air inlet  
(4) Industrial grade wheels  
Installation guide / Operations manual

##### Standard Filter Set


Adsorbent Cell: Large capacity  
gas/odor filter (2)

##### Options:

- High efficiency hoods
- Optional piped exhaust
- Gas-specific adsorbent cells

### FUMEX ACCESSORIES

#### Articulating Source - Capture Arms



Articulating Source-Capture Arms

#### Source Capture Hoods



Domed Hood  
14" diameter x 2"Ø or 3"Ø Hose



Rectangular Hood  
4" x 1" x 2"Ø Hose



Bench-Mounted Metal Hood  
12" x 5" x 5" x 2"Ø Hose



Clear Flat Screen Hood  
12" x 8" x 2"Ø or 3"Ø Hose



High Efficiency Aluminum Hoods  
1", 2"Ø or 3"Ø Hoses



Flexible Rubber Hoses  
2"Ø, 3"Ø